

Features

- RoHS compliant* versions available
- Overvoltage/lightning protection to ITU-T K.20
- Standard “off-the-shelf” design
- Typical application is secondary protection on telecom line cards

4B08B-513-RC - Surge Line Protection Module

Electrical Characteristics

Resistance Values (R1 = R2).....	50 & 100 Ω
Resistance Tolerance	±2 %
TCR.....	100 ppm/°C
Ratio Tolerance.....	±0.3 %
Power Dissipation (per resistor) @ 25 °C	2 W
Temperature Range.....	-55 °C to +125 °C

Environmental Characteristics

Tests per MIL-STD-202.....	Δ R max.
Resistance to Solvents.....	No marking deterioration
Resistance to Solder Heat.....	± 0.5 Ω
Solderability.....	>95 % Coverage
Insulation Resistance	10 MΩ min. (isolated pins)
Bias Humidity Test.....	50 V / 85 % RH / 85 °C


Physical Characteristics

Body Style.....	Open Frame SIP
Substrate Material.....	96 % Alumina
Lead Frame Material.....	Copper, solder coated
Flammability	Conforms to UL94V-0


Functional Characteristics

Lightning Surge Test.....	10 x 700 μSec, 1 KV
Power Induction	300 V rms
Power Contact	220 V rms

Product Dimensions

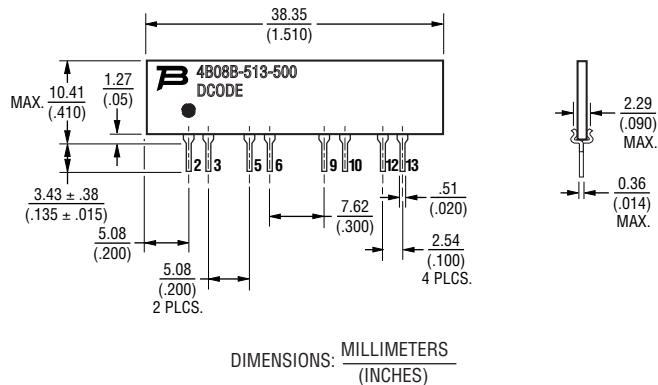

Electrical Schematic

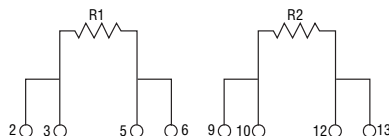

How To Order

4B 08 B - 513 - XXX LF

Model _____
(4B = Open Frame)

Number of Pins _____

Physical Configuration _____

Electrical Configuration _____
513 = Matched pair of resistors plus thermal fuse

Resistance Code _____
• 500 = 50 ohms
• 101 = 100 ohms

RoHS Compliant Option _____
Blank = Standard Product
LF = RoHS Compliant Product

BOURNS®

Asia-Pacific:

TEL +886- (0)2 25624117
FAX +886- (0)2 25624116

Europe:

TEL +41-41 7685555
FAX +41-41 7685510

The Americas:

TEL +1-951 781-5500
FAX +1-951 781-5700

www.bourns.com