

Features

- Very compact design - doubles pair-density compared to older 303-type connector blocks; provides generous working space between connectors
- Front-facing jumper and test field - reduced jumper installation time plus easy access to test field
- Industry-standard configuration accepts all standard 303-type protector modules
- Multiple grounding options - choice of frame or isolated grounding

Model C(G)-391 100-Pair Connector

Bourns® C(G)-391 Connector is our most compact 100-pair central/remote office connector. This 238 mm high (9.37 in.), narrow-profile connector is designed to increase frame capacity without sacrificing valuable workspace. One 303-type connector can be replaced by two C(G)-391 connectors – doubling the pair count in the same space.

The C(G)-391 connector is ideal for use in remote switch and digital line carrier locations, as frame space in huts and controlled environment vaults (CEVs) is usually at a premium. The C(G)-391 connector is also compatible with Private Automatic Branch Exchange (PABX) and Centrex systems that use combination frame configurations – where terminal blocks and connectors are mounted on the same side of the frame. It also provides an excellent termination point for protector frame systems that use separate intermediate distribution frames for cross-connecting.

The C(G)-391 connector's narrow profile provides 114 mm (4.5 in.) of work space between adjacent connectors, allowing ample room for cross-connect (jumper) wiring and frame administration. The angled mounting allows easy access to the individual protector units, arranged in a 10x10 configuration. The front facing jumper and test fields are always within reach and the front and rear snap-through fanning strips encourage orderly wire management to simplify maintenance efforts. The stub cable and jumper wire terminations are completed using wire-wrap technology.

The C(G)-391 connector may be ordered stubless or with 22 or 24 AWG stub cable. Connectors equipped with a stub cable are shipped in the stub-down orientation. The stub direction may be reversed in the field as required.

The C(G)-391 connector accepts the full line of industry-standard 303-type, 5-pin protector modules including Bourns® hybrid, solid-state and gas tube modules. The protector module contacts in the C(G)-391 connector are available with either tin-alloy or gold-plating. Accordingly, the plating on the pins of the protector modules should match the connector to ensure optimal performance.

Specifications

Plastic Materials

Main Body..... Polycarbonate, ivory, UL 94V-0

Metal Parts

Mounting Hardware Steel, zinc-plated

Current-Carrying Components Copper or copper alloys, tin-plated

Cable Stub

Description..... 22 or 24 AWG, 100-pair; bonded or unbonded PVC jacket, locking swivel mount

Pressure Unpressurized

Termination Wire-wrap

Grounding #10 AWG cable ground (drain wire) to mounting bracket

Resistance <5 milliohms (from cable shield bond to connector ground reference)

Cross-Connect (Jumper) Connections

Termination Wire-wrap

Contact Resistance..... < 2 milliohms

Dielectric Strength > 1500 VDC and >1000 VAC @ 50-60 Hz for two minutes

Insulation Resistance > 30 megohms @ 1000 VDC

Environmental Conditions Operating environment with temperature ranging from 0 °C (+32 °F) to +50 °C (+122 °F) up to 95% R.H.

Temperature Characteristics

High Temperature..... +60 °C (+140 °F) without deformation

Frame Vertical Capacities

Height 2.13 m (7.0 ft.) 700 pairs

Height 2.44 m (8.0 ft.) 800 pairs

Height 2.74 m (9.0 ft.) 1000 pairs


Height 3.51 m (11.5 ft.) 1200 pairs

Height 4.27 m (14.0 ft.) 1700 pairs

Model C(G)-391 100-Pair Connector

BOURNS®

Product Dimensions

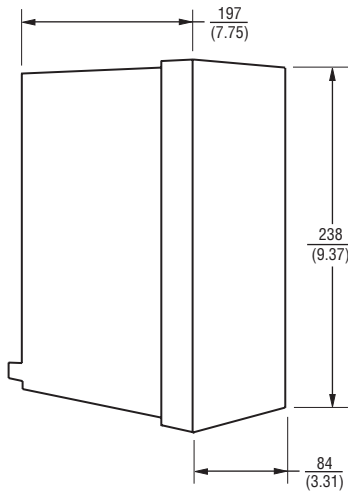

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Packaging Specifications

Product Code	Std. Pack	Stub Length m (ft.)	Size (H x W x D) mm (in.)	Weight kg (lb.)
Stubless				
NT8Gx0AA	1	0	310 x 360 x 180 (12 x 14 x 7)	3.2 (7)
22 AWG Stub				
NT8GxxAG	1	9.1 (30)	790 x 790 x 150 (31 x 31 x 6)	13.2 (29)
NT8GxxAL	1	15.2 (50)	790 x 790 x 150 (31 x 31 x 6)	20.0 (44)
NT8GxxAS	1	24.4 (80)	790 x 790 x 150 (31 x 31 x 6)	29.5 (65)
NT8GxxBA	1	30.5 (100)	790 x 790 x 300 (31 x 31 x 12)	36.3 (80)
24 AWG Stub				
NT8GxxAG	1	9.1 (30)	790 x 790 x 150 (31 x 31 x 6)	10.0 (22)
NT8GxxAL	1	15.2 (50)	790 x 790 x 150 (31 x 31 x 6)	14.1 (31)
NT8GxxAS	1	24.4 (80)	790 x 790 x 150 (31 x 31 x 6)	20.4 (45)
NT8GxxBA	1	30.5 (100)	790 x 790 x 300 (31 x 31 x 12)	24.9 (55)

How to Order

Product Code	Part Number	Description
Stubless		
NT8G10AA	A0352994	CG-391 Connector, 100 pair, gold, right-hand mount, frame ground, stubless
NT8G20AA	A0409909	CG-391 Connector, 100 pair, gold, left-hand mount, frame ground, stubless
NT8G80AA	A0353600	C-391 Connector, 100 pair, tin, left-hand mount, isolated ground, stubless
Gold, Right-Hand Mount, Frame Ground		
NT8G11AG	A0353506	CG-391 Connector, 100 pair, gold, right-hand mount, frame ground, 24 AWG 30 ft stub down
NT8G11AL	A0353502	CG-391 Connector, 100 pair, gold, right-hand mount, frame ground, 24 AWG 50 ft stub down
NT8G11AS	A0353503	CG-391 Connector, 100 pair, gold, right-hand mount, frame ground, 24 AWG 80 ft stub down
Gold, Left-Hand Mount, Frame Ground		
NT8G21AL	A0388377	CG-391 Connector, 100 pair, gold, left-hand mount, frame ground, 24 AWG 50 ft stub down
NT8G21BA	A0409342	CG-391 Connector, 100 pair, gold, left-hand mount, frame ground, 24 AWG 100 ft stub down
NT8G22BA	A0409343	CG-391 Connector, 100 pair, gold, left-hand mount, frame ground, 22 AWG 100 ft stub down

Note: Order by Part Number.

Model C(G)-391 100-Pair Connector

BOURNS®

How to Order (Continued)

Product Code	Part Number	Description
<i>Tin, Left-Hand Mount, Isolated Ground</i>		
NT8G83AG	A0355687	C-391 Connector, 100 pair, tin, left-hand mount, isolated ground, 24 AWG 30 ft stub down
NT8G83AL	A0355689	C-391 Connector, 100 pair, tin, left-hand mount, isolated ground, 24 AWG 50 ft stub down
NT8G83AS	A0355690	C-391 Connector, 100 pair, tin, left-hand mount, isolated ground, 24 AWG 80 ft stub down
NT8G84AG	A0355693	C-391 Connector, 100 pair, tin, left-hand mount, isolated ground, 22 AWG 30 ft stub down
NT8G84BA	A0355697	C-391 Connector, 100 pair, tin, left-hand mount, isolated ground, 22 AWG 100 ft stub down

Note: Order by Part Number.