




**BOURNS®**

### Features

- Snap-in POTS splitter installation
- Accepts 3611 type POTS splitters
-  Listed per UL 1863
- Indoor or outdoor applications

## 7043 Series - POTS Splitter Enclosure

Bourns® Model 7043 Series simplifies the installation of DSL systems where there are no vacant positions in the installed NID. Bourns® 3611x2 for ADSL2+ / VDSL snaps into the 7043 box at the subscriber premises. The weather-resistant enclosure is manufactured of high-impact resistant, ultraviolet desensitized, flame retardant material. A sectionalized grommet allows for wire entry and exit. The cover can be embossed with a company logo or other details.

### How to Order

**7043 - 0X - XX**

**Model Number Designator** \_\_\_\_\_



**POTS Splitter Quantity** \_\_\_\_\_

- 1 = One
- 0 = None (enclosure only)

**POTS Splitter Type** \_\_\_\_\_

- P1 = ADSL2+ Part Number 3611A2
- V1 = VDSL2 Part Number 3611V2
- 0 = None

### Product Dimensions

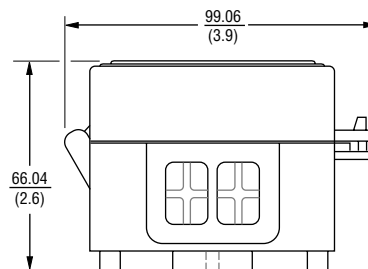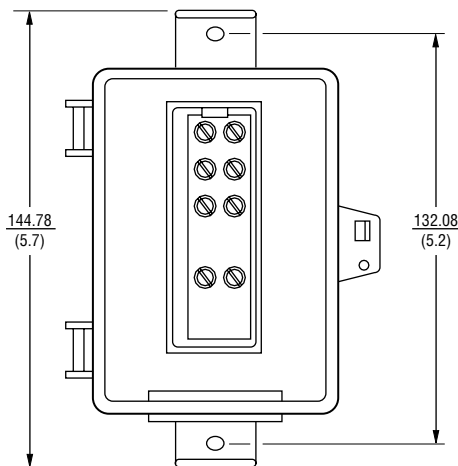

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

**BOURNS®**

**Asia-Pacific:** Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

**Europe:** Tel: +41-41 768 5555 • Fax: +41-41 768 5510

**The Americas:** Tel: +1-951 781-5500 • Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

REV. E 04/11

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.